
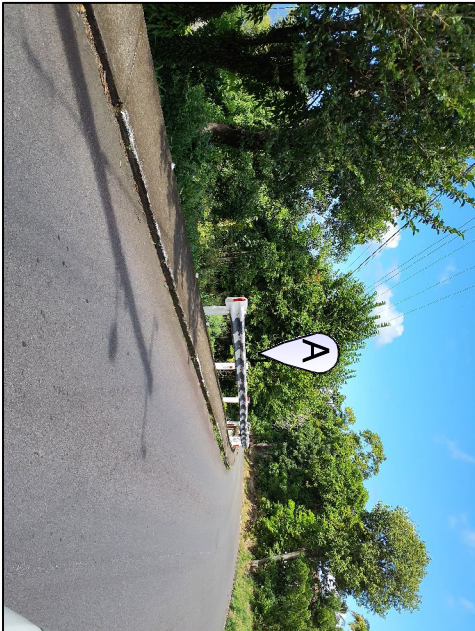


Quotation for Refurbishment of Guardrail Barriers at Runway Ghaut to Woodlands (Winspeare's Residence)

Preambles					
A.	The contractor shall be deemed to have revised quotation documents, inspected and examined the site and it's surroundings, and have satisfied himself to the nature of the ground before submitting his quotation. He shall also be deemed to have taken into account the form and nature of the site, the extent and nature of the work and materials necessary for the completion of the works.				
B.	Any discrepancy between the Specifications, Drawings and Bills of Quantities shall be brought to the notice of the Engineer in writing before work, which is the subject of the discrepancy, is commenced. Dimensions and sizes shown in the drawings shall generally take precedence over those stated in the Specifications.				
C.	Payments due under the contract shall be determined by applying the unit rates to the quantities executed for the respective items, in accordance with the BoQ and contract.				
No.	Item	Units	Quantity	Rate	Total
1.00	<u>Preliminaries</u>				
1.01	Mobilization				
1.01.1	This item includes insurance (works and employees), equipment, supplies, maintenance of traffic, temporary works, safety measures, etc. required for the proper completion of works as specified in the Special Conditions. It includes the pre-construction submittals of: work schedule, quality control plan, safety and traffic control program. It includes also all obligations, and liabilities conferred on the contractor by the bidding documents, and all required for the completion of the works.	ls	1.00		
2.00	<u>Health and Safety</u>				
2.01	In accordance with the labour regulations the works shall be carried out in a manner that is safe to all employees on site and to the general public. Hence employees shall be attired with high visibility vest, hard hats and enclosed footwear. Provision shall also be made for employees to wear safety goggles where necessary.	item	1.00		
	<u>Painting Guardrail Barriers</u>				
2.02	Paint shall be applied to properly prepared, clean and dry surfaces. No paint shall be applied to surface structurally or superficially damp and all surfaces must be ascertained to be free from condensation, efflorescence, etc. before application of each coat. The surface shall first be scrapped to remove mortar splashes. The surface shall then be rubbed down with fine glass paper to remove loose particles and to smooth irregularities				
	<u>Runaway Ghaut - Woodlands - Metal Barriers</u>				
	<u>Preparatory Works</u>				
3.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.04 titled "Runaway Ghaut to- Woodlands"	ft	414.00		
	<u>Surface Protection</u>				
3.02	Apply one coat of rust inhibiting "galvanized" primer or other approved equal to be applied by brushing well into the surface and shall be allowed to dry and harden thoroughly before the application of subsequent coats. All in accordance with details on Sheet No.04 titled "Runaway Ghaut to- Woodlands"	ft ²	538.20		
	<u>Painting</u>				
3.03	Apply two coats of white enamel paint to surface of guardrail: one undercoat and one finishing coats. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.04 titled "Runaway Ghaut to- Woodlands"	ft ²	538.20		
3.04	Apply one coat of black enamel paint over coated white enamel paint. Dimension of 24" x 12" high spaced @ 24" apart.	ft ²	269.10		

	Runaway Ghaut - Woodlands - Headwalls				
	<u>Preparatory Works</u>				
4.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.04 titled "Runaway Ghaut to- Woodlands"	ft	46.00		
	<u>Surface Protection</u>				
4.02	Apply one coat of primer to be applied by brushing well into the surface and shall be All in accordance with details on Sheet No.04 titled "Runaway Ghaut to- Woodlands"	ft ²	227.32		
	<u>Painting</u>				
4.03	Apply two coats of white enamel paint to surface of headwall: one undercoat and one finishing coat. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.04 titled "Runaway Ghaut to- Woodlands"	ft ²	227.32		
	Woodlands-Near Winspear - Metal Barriers				
	<u>Preparatory Works</u>				
5.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.05 titled "Woodlands-Near Winspear"	ft	83.00		
	<u>Surface Protection</u>				
5.02	Apply one coat of rust inhibiting "galvanized" primer or other approved equal to be applied by brushing well into the surface and shall be allowed to dry and harden thoroughly before the application of subsequent coats. All in accordance with details on Sheet No.05 titled "Woodlands-Near Winspear"	ft ²	107.90		
	<u>Painting</u>				
5.03	Apply two coats of white enamel paint to surface of guardrail: one undercoat and one finishing coats. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.05 titled "Woodlands-Near Winspear"	ft ²	107.90		
5.04	Apply one coat of black enamel paint over coated white enamel paint. Dimension of 24" x 12" high spaced @ 24" apart.	ft ²	53.95		
	Woodlands-Near Winspear - Woodlands - Headwalls				
	<u>Preparatory Works</u>				
6.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.05 titled "Woodlands-Near Winspear"	ft	167.00		
	<u>Surface Protection</u>				
6.02	Apply one coat of primer to be applied by brushing well into the surface and shall be All in accordance with details on Sheet No.05 titled "Woodlands-Near Winspear"	ft ²	832.22		
	<u>Painting</u>				
6.03	Apply two coats of white enamel paint to surface of headwall: one undercoat and one finishing coat. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.05 titled "Woodlands-Near Winspear"	ft ²	832.22		
	Total to Form Quotation				

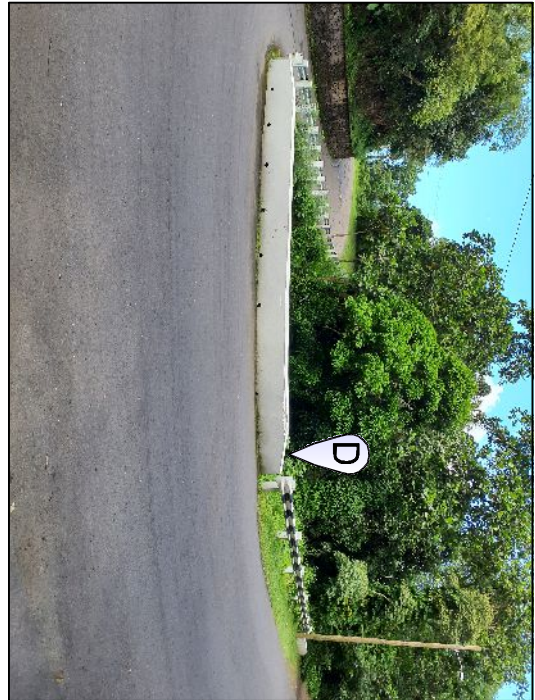

- A) Metal Crash Barrier -170'-0"
- B) Concrete Headwall 10'-0"L x 16"H
- C) Metal Crash Barrier -31'-0"
- D) Metal Crash Barrier -213'-0" / Concrete Headwall
- E) Concrete Headwall 21'-0" x 24"
- F) Concrete Headwall 15'-0" x 24"

GENERAL NOTES

No.	Revision / Issue	By	Chk	Da

Public Works Department

P.O. Box 344

Montserrat

West Indies



Tel: 664- 491 -2521/2

Fax: 664- 491 - 3475

Email: gov_eng@candw.tr

PROJECT: CRASH BARRIER/HEADWALL MAINTENANCE	
TITLE: RUNAWAY GHAUT-WOODLAND	
DESIGN: PWD	JOB #: 0
DRAWN: OREENU	
CHECKED: PWD	
FILE PATH: 0	
SHEET NO.: 04	
DATE: 24/11/2022	
SCALE: 0	

GENERAL NOTES

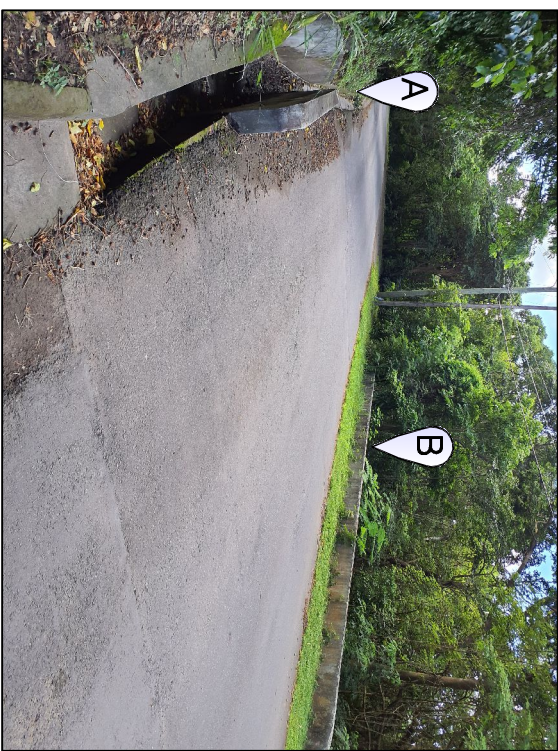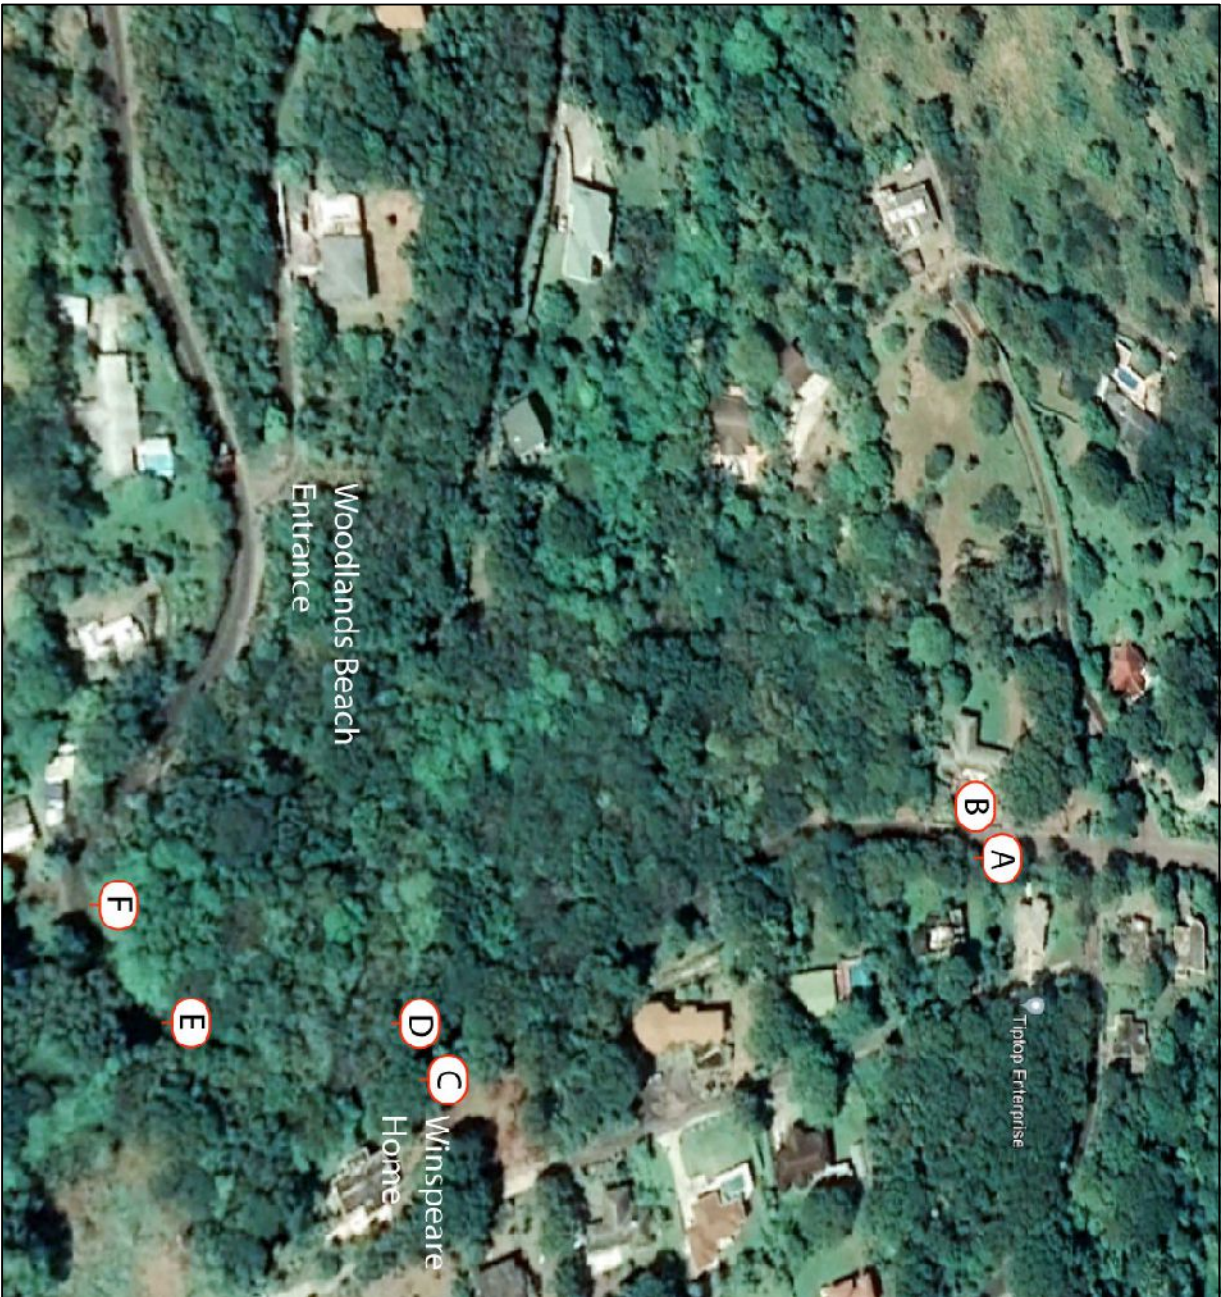

- A Concrete Headwall 16'-0" L x 24" H**
- B Concrete Headwall 69'-0" L x 24" H**



- C** Concrete Headwall 29'-0" L x 24" H



- E** Metal Crash Barrier - 83'-0"
- F** Concrete Headwall 16'-0" L x 16" H

No.	Revision / Issue	By	Chk	Da
-----	------------------	----	-----	----



Public Works Department
P.O. Box 344
Montreal
West Indies
Tel: 664-491-2521/2
Fax: 664-491-3475
Email: gov.eng@canwv.tr

PROJECT: CRASH BARRIER/HEADWALL MAINTENANCE

TITLE: **WOODLANDS-NEAR WINSPEAR**

DESIGN: PWD	JOB #: 0
-------------	----------

DRAWN: OREENJ

CHECKED: PWD

FILE PATH: 0	SHEET NO.:
-----------------	------------

DATE: 24/11/2022

05

SCALE: 0	
----------	--