


Quotation for Refurbishment of Headwalls in Salem Centre to Montserrat Secondary School					
Preambles A. The contractor shall be deemed to have revised quotation documents, inspected and examined the site and it's surroundings, and have satisfied himself to the nature of the ground before submitting his quotation. He shall also be deemed to have taken into account the form and nature of the site, the extent and nature of the work and materials necessary for the completion of the works. B. Any discrepancy between the Specifications, Drawings and Bills of Quantities shall be brought to the notice of the Engineer in writing before work, which is the subject of the discrepancy, is commenced. Dimensions and sizes shown in the drawings shall generally take precedence over those stated in the Specifications. C. Payments due under the contract shall be determined by applying the unit rates to the quantities executed for the respective items, in accordance with the BoQ and contract.					
No.	Item	Units	Quantity	Rate	Total
1.00	Preliminaries				
1.01	Mobilization	l.s	1.00		
1.01.1	This item includes insurance (works and employees), equipment, supplies, maintenance of traffic, temporary works, safety measures, etc. required for the proper completion of works as specified in the Special Conditions. It includes the pre-construction submittals of: work schedule, quality control plan, safety and traffic control program. It includes also all obligations, and liabilities conferred on the contractor by the bidding documents, and all required for the completion of the works.				
2.00	Health and Safety				
2.01	In accordance with the labour regulations the works shall be carried out in a manner that is safe to all employees on site and to the general public. Hence employees shall be attired with high visibility vest, hard hats and enclosed footwear. Provision shall also be made for employees to wear safety goggles where necessary.	item	1.00		
	Painting Guardrail Barriers Paint shall be applied to properly prepared, clean and dry surfaces. No paint shall be applied to surface structurally or superficially damp and all surfaces must be ascertained to be free from condensation, efflorescence, etc. before application of each coat. The surface shall first be scraped to remove mortar splashes. The surface shall then be rubbed down with fine glass paper to remove loose particles and to smooth irregularities				
	Salem Anglican Church Headwall <u>Preparatory Works</u>				
3.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.01 titled "Salem"	ft	10.00		
	<u>Surface Protection</u>				
3.02	Apply one coat of primer to be applied by brushing well into the surface and shall be allowed to dry and harden thoroughly before the application of subsequent coats. All in accordance with details on Sheet No.01 titled "Salem"	ft ²	32.00		
	<u>Painting</u>				
3.03	Apply two coats of white enamel paint to surface of headwall: one undercoat and one finishing coat. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.01 titled "Salem"	ft ²	32.00		
	Salem - Near Salem Clinic/Rams - Headwalls <u>Preparatory Works</u>				
4.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.02 titled "Salem - Near Clinic/Rams"	ft	81.00		
	<u>Surface Protection</u>				
4.02	Apply one coat of primer to be applied by brushing well into the surface and shall All in accordance with details on Sheet No.02 titled "Salem - Near Clinic/Rams"	ft ²	367.40		
	<u>Painting</u>				
4.03	Apply two coats of white enamel paint to surface of headwall: one undercoat and one finishing coat. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.02 titled "Salem - Near Clinic/Rams"	ft ²	367.40		
	Salem - Near M.S.S - Headwalls <u>Preparatory Works</u>				
5.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.03 titled "Salem - Near M.S.S."	ft	122.00		
	<u>Surface Protection</u>				
5.02	Apply one coat of primer to be applied by brushing well into the surface and shall All in accordance with details on Sheet No.03 titled "Salem - Near M.S.S."	ft ²	634.00		
	<u>Painting</u>				
5.03	Apply two coats of white enamel paint to surface of headwall: one undercoat and one finishing coat. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.03 titled "Salem - Near M.S.S."	ft ²	634.00		
Total to Form Quotation					



A

No.	Revision / Issue	By	Chk	Da



PROJECT: CRASH BARRIER/HEADWALL MAINTENANCE	
TITLE: SALEM	
DESIGN: PWD	JOB #: 0
DRAWN: OREENU	
CHECKED: PWD	
FILE PATH: 0	SHEET NO.: 01
SCALE: 0	

Downloaded from <http://ajph.org/> on November 10, 2014




A Concrete Headwall 27'-0" L x 16" H



B Concrete Headwall 11'-0" L x 16" H

- C** Concrete Headwall 22'-0" L x 24" H

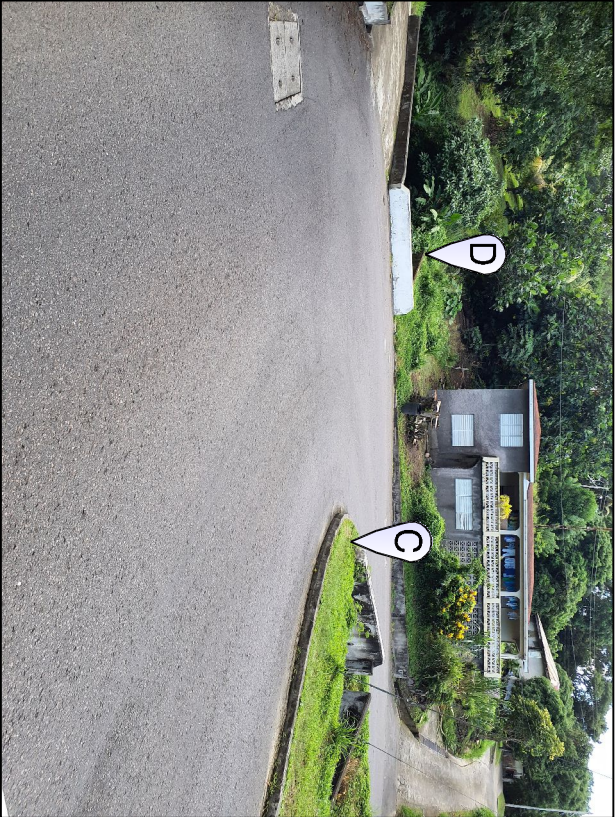

No.	Revision / Issue	By	Chk	Da

Public Works Department
P.O. Box 344
Montserral
West Indies
Tel: 664-491-2521/2
Fax: 664-491-3475
Email: gov.eng@candw.jt

PROJECT: CRASH BARRIER/HEADWALL MAINTENANCE	
TITLE: SALEMI -NEAR CLINIC/ RAMPS	
DESIGN: PWD	JOB #: 0

DRAWN: ORENUJ
CHECKED: PWD

FILE PATH: 0	SHEET NO.: 02
DATE: 24/11/2022	

SCALE: 0



- A Concrete Headwall 11'-0" L x 24" H
- B Concrete Headwall 10'-0" L x 24" H



- C Concrete Headwall 7'-0" L x 24" H
- D Concrete Headwall 9'-0" L x 24" H



- E Concrete Headwall 12'-0" L x 24" H
- F Concrete Headwall 73'-0" L x 24" H

GENERAL NOTES

No.	Revision / Issue	By	Chk	Da

Public Works Department

P.O. Box 344

Montserral

West Indies

Tel: 664- 491 -2521/2

Fax: 664- 491 - 3475

Email: gov.eng@candw.tt

PROJECT: CRASH BARRIER/HEADWALL MAINTENANCE	
TITLE: SALEM -NEAR M.S.S.	
DESIGN: PWD	JOB #: 0
DRAWN: OREENU	
CHECKED: PWD	
FILE PATH: 0	
SHEET NO.: 03	
DATE: 24/11/2022	
SCALE: 0	