
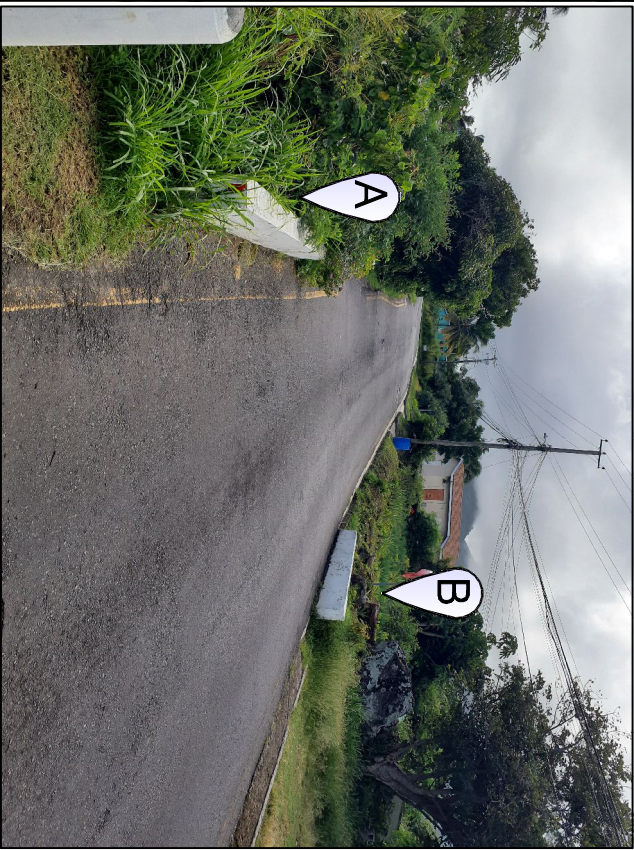


Quotation for Refurbishment of Guardrail Barriers - Carr's Bay to Challenger's Road Junction St. Johns

Preambles					
A.	The contractor shall be deemed to have revised quotation documents, inspected and examined the site and it's surroundings, and have satisfied himself to the nature of the ground before submitting his quotation. He shall also be deemed to have taken into account the form and nature of the site, the extent and nature of the work and materials necessary for the completion of the works.				
B.	Any discrepancy between the Specifications, Drawings and Bills of Quantities shall be brought to the notice of the Engineer in writing before work, which is the subject of the discrepancy, is commenced. Dimensions and sizes shown in the drawings shall generally take precedence over those stated in the Specifications.				
C.	Payments due under the contract shall be determined by applying the unit rates to the quantities executed for the respective items, in accordance with the BoQ and contract.				
No.	Item	Units	Quantity	Rate	Total
1.00	<u>Preliminaries</u>				
<u>1.01</u>	Mobilization				
1.01.1	This item includes insurance (works and employees), equipment, supplies, maintenance of traffic, temporary works, safety measures, etc. required for the proper completion of works as specified in the Special Conditions. It includes the pre-construction submittals of: work schedule, quality control plan, safety and traffic control program. It includes also all obligations, and liabilities conferred on the contractor by the bidding documents, and all required for the completion of the works.	1.s	1.00		
2.00	<u>Health and Safety</u>				
2.01	In accordance with the labour regulations the works shall be carried out in a manner that is safe to all employees on site and to the general public. Hence employees shall be attired with high visibility vest, hard hats and enclosed footwear. Provision shall also be made for employees to wear safety goggles where necessary.	item			
	<u>Painting Guardrail Barriers</u>				
	Paint shall be applied to properly prepared, clean and dry surfaces. No paint shall be applied to surface structurally or superficially damp and all surfaces must be ascertained to be free from condensation, efflorescence, etc. before application of each coat. The surface shall first be scrapped to remove mortar splashes. The surface shall then be rubbed down with fine glass paper to remove loose particles and to smooth irregularities				
2.02					
3.00	<u>Carr's Bay - Metal Barriers</u>				
	<u>Preparatory Works</u>				
3.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.16 titled "Carr's Bay"	ft	177.00		
	<u>Surface Protection</u>				
3.02	Apply one coat of rust inhibiting "galvanized" primer or other approved equal to be applied by brushing well into the surface and shall be allowed to dry and harden thoroughly before the application of subsequent coats. All in accordance with details on Sheet No.16 titled "Carr's Bay"	ft²	230.10		
	<u>Painting</u>				
3.03	Apply two coats of white enamel paint to surface of guardrail: one undercoat and one finishing coats. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.16 titled "Carr's Bay"	ft²	230.10		
3.04	Apply one coat of black enamel paint over coated white enamel paint. Dimension of 24" x 12" high spaced @ 24" apart.	ft²	115.05		

4.00	Carr's Bay - Headwalls				
	<u>Preparatory Works</u>				
4.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.16 titled "Carr's Bay"	ft	190.00		
	<u>Surface Protection</u>				
4.02	Apply one coat of primer to be applied by brushing well into the surface and shall be All in accordance with details on Sheet No.16 titled "Carr's Bay"	ft ²	1032.34		
	<u>Painting</u>				
4.03	Apply two coats of white enamel paint to surface of headwall: one undercoat and one finishing coat. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.16 titled "Carr's Bay"	ft ²	1032.34		
5.00	Davy Hill-Near Silan Shop - Headwalls				
	<u>Preparatory Works</u>				
5.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.17 titled "Davy Hill"	ft	30.00		
	<u>Surface Protection</u>				
5.02	Apply one coat of primer to be applied by brushing well into the surface and shall be All in accordance with details on Sheet No.17 titled "Davy Hill"	ft ²	135.99		
	<u>Painting</u>				
5.03	Apply two coats of white enamel paint to surface of headwall: one undercoat and one finishing coat. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.17 titled "Davy Hill"	ft ²	135.99		
6.00	St. Johns - Lower - Headwalls				
	<u>Preparatory Works</u>				
6.01	Waterjet cleaning to completely remove all mill scale, mold, rust, rust scale, previous coating, etc. leaving the surface a clean uniform gray-white color. All in accordance with details on Sheet No.18 titled "St.John's Lower"	ft	34.00		
	<u>Surface Protection</u>				
6.02	Apply one coat of primer to be applied by brushing well into the surface and shall be All in accordance with details on Sheet No.18 titled "St.John's Lower"	ft ²	125.28		
	<u>Painting</u>				
6.03	Apply two coats of white enamel paint to surface of headwall: one undercoat and one finishing coat. Allow first coat to dry and harden thoroughly before the application of subsequent finishing coat. All in accordance with details on Sheet No.18 titled "St.John's Lower"	ft ²	125.28		
Total to Form Quotation					

GENERAL NOTES

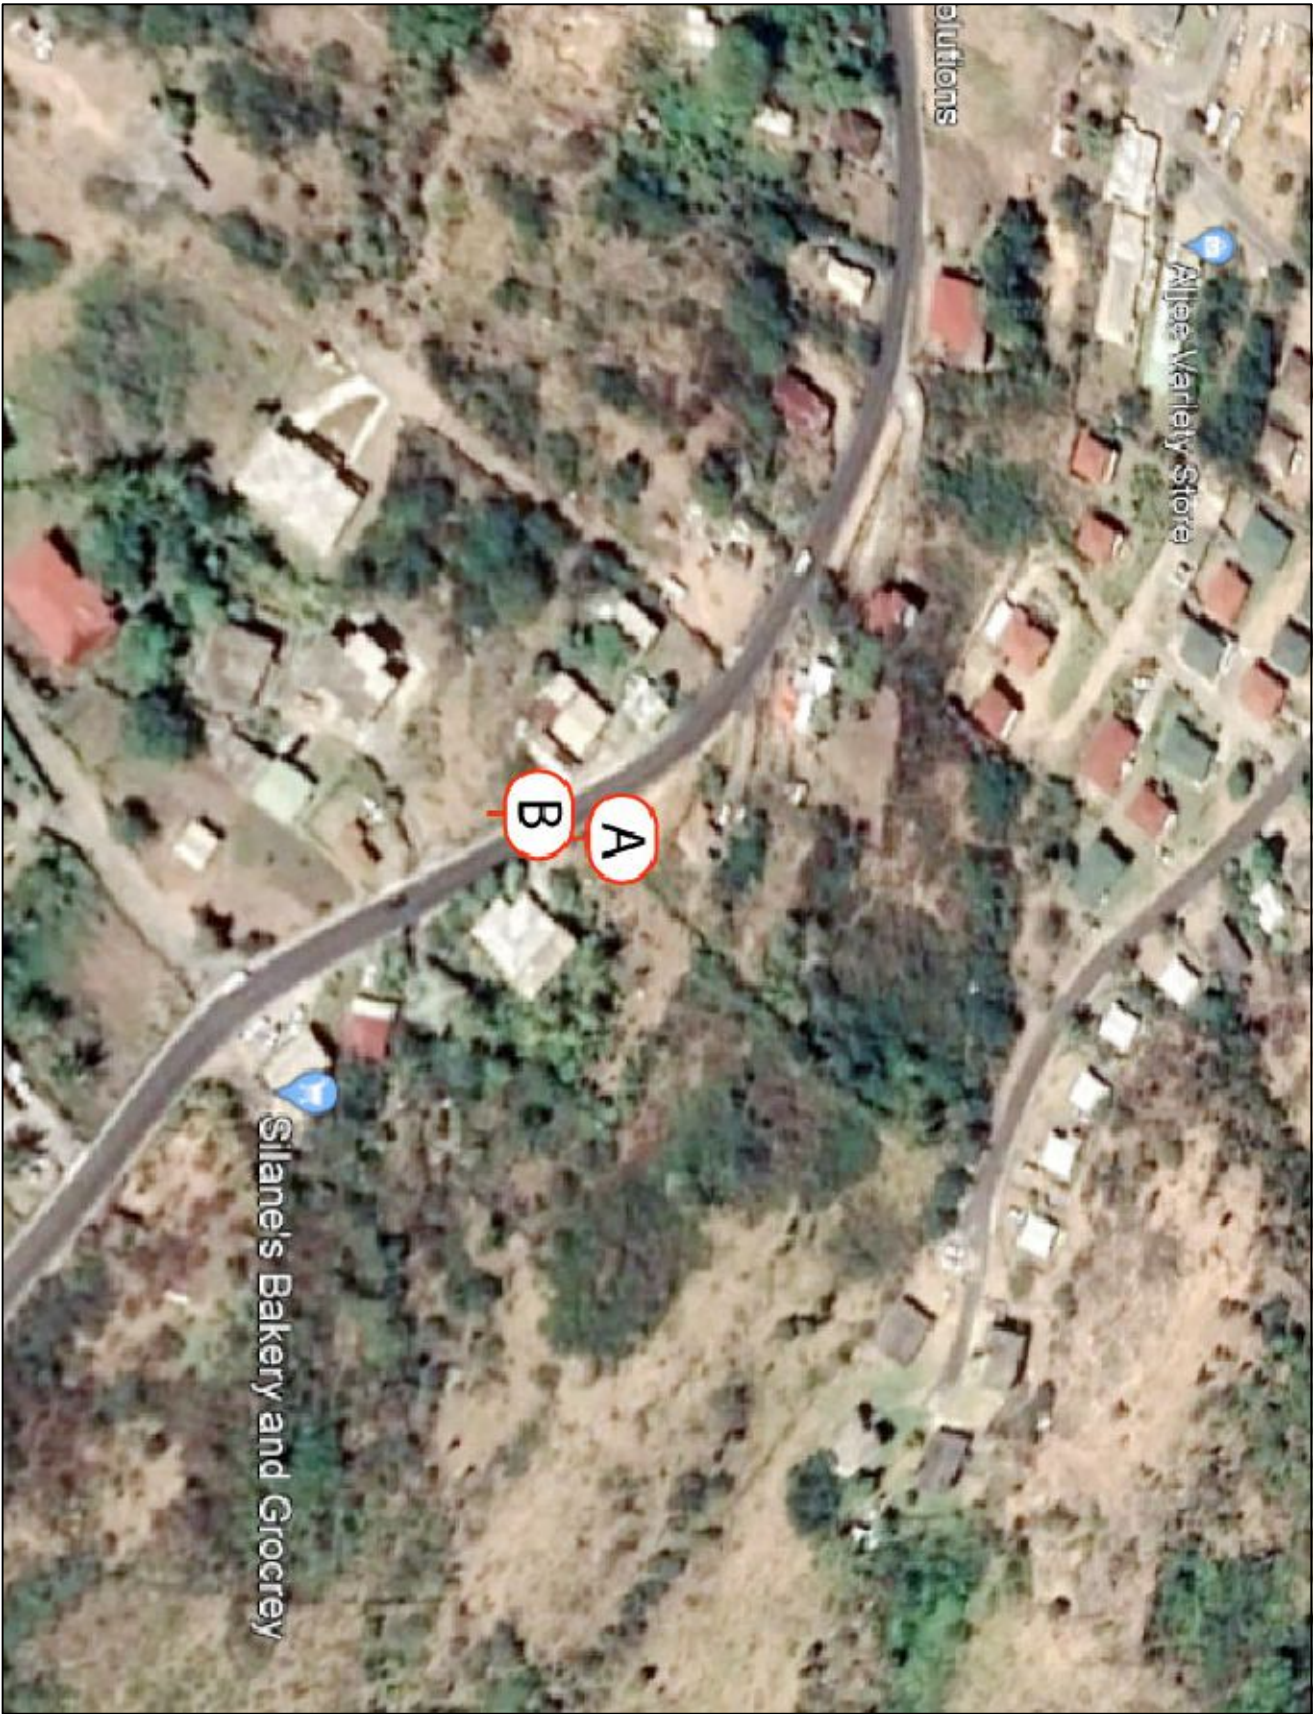

- A Concrete Headwall 16'-0" L x 18" H
- B Concrete Headwall 14'-0" L x 22" H

[illegible]


Public Works Department
P.O. Box 344
Montserrat
West Indies
Tel: 664- 491 -2521/2
Fax: 664- 491 - 3475
Email: gov_eng@canbw.tn

PROJECT: CRASH BARRIER/HEADWALL MAINTENANCE	
TITLE: DAVY HILL	
DESIGN: PWD	JOB #: 0
DRAWN: O'REENU	
CHECKED: PWD	
FILE PATH: 0	SHEET NO.: 17
SCALE: 0	



- A Concrete Headwall 27'-0"L x 15"H
- B Concrete Headwall 7'-0"L x 16"H

No.	Revision / Issue	By	Chk	Da

	Public Works Department P.O. Box 344 Montserrat West Indies Tel: 664- 491 -2521/2 Fax: 664- 491 - 3475 Email: gov.eng@candw.tr
---	--

PROJECT: CRASH BARRIER/HEADWALL MAINTENANCE	
TITLE: ST. JOHNS- LOWER	
DESIGN: PWD	JOB #: 0
DRAWN: OREENU	
CHECKED: PWD	

FILE PATH: 0	SHEET NO.: 18
DATE: 30/11/2022	
SCALE: 0	